




DMR Srl
Telefono: 0871 950290
Email: info@dmrleanmanufacturing.it

Il Basic Smooth è realizzato in poliuretano a bassa densità ed anti-fatica. Questo tappeto piatto è ideale per ambienti asciutti, non critici che combinano aree di lavoro in cui si sta seduti e in cui si lavora in piedi. Nessun tappeto liscio offre maggiore sollievo e comfort allo stesso prezzo.

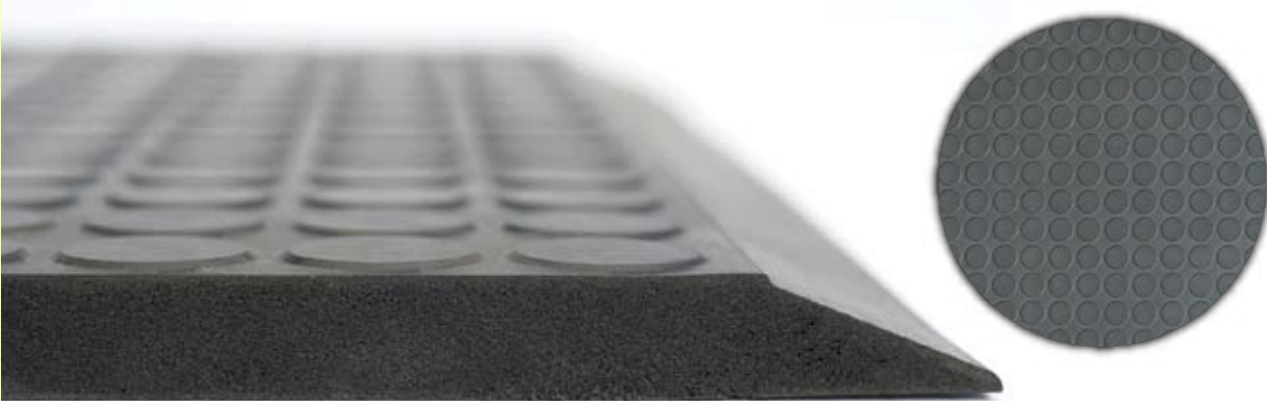

Basic Smooth

Caratteristiche di Sicurezza senza pari

- Bordi smussati
- Non si arricciano, eliminando i rischi di inciampo
- Qualsiasi dimensione, qualsiasi forma, sempre in un solo pezzo
- Niente tappeti collegati, sovrapposti od usati, eliminando anche il rischio di inciampo

Non solo anti fatica, anche reali benefici ergonomici

- Design ergonomici unici, che eliminano e prevengono i problemi tipici di ambienti in cui si sta in piedi, stimolando il corpo ad aumentare la circolazione sanguigna e la prontezza dei riflessi, riducendo le assenze per malattia, i risarcimenti ai lavoratori ed i problemi legati alla qualità.

I vantaggi di Basic Smooth
 Tappeto solido in ogni parte.
 Privo di silicone e lattice.

2-Year Warranty

All product lines are conditionally warranted against normal usage* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase. The warranty only covers the replacement of the product, no direct or indirect costs are covered.

* It is considered normal usage when a person stands or walks on the with regular footwear in an environment where the temperature is under 25° C (77° F) and the humidity is below 80%.



CONTRADA CERRETO 403, MIGLIANICO (ch) 66010. EMAIL- info@dmrleanmanufacturing.it

Properties	Standard	Basic Smooth
Material		Foamed Polyurethane
Color		Anthracite
Weight		1900 g +/- 50 g // 4.2 lbs +/- 0.1 lbs
Length without beveled edges		91 cm +/- 1% // 35.8" +/- 0.38"
Width without beveled edges		60 cm +/- 1% // 23.5" +/- 0.38"
Thickness		11 mm // 0.43 in
Density	ISO 2781	330 kg/m ³ +/- 10 %
Hardness	DIN 53505	18-28 Sh A
Abrasion Load = 5 N	ISO 46 49 (5 N)	800 mm ³ // 31.5 in ³
Breaking point / tensile strength	EN ISO 527-1	1 Mpa
Elongation at break	EN ISO 527-1	200%
Tearing strength	ASTM D 624	1,5 N/mm
Electrical resistance Surface point to point % 50 RH	IEC-61340-4-1/ ESD STM7.1-2001	> 20 x 10 ⁹ Ω
Thermal properties Minimum use Maximum use Maximum short duration	The ergonomic properties remain	0°C // 32°F 80°C // 176°F 120°C // 248°F
UV-resistance		Inferior
Cleanroom application	EN ISO 14644-1	Not tested
Warranty		2 years